

80x80x80 mm

122.0~151.5 CFM



Specifications

Model	Bearing	Rating Voltage	Power Current	Power Consumption	Speed in / out	Air Flow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(Inch-H ₂ O)	(dB(A))	(g)	
PF80801BX-0000-A9H	☉	12	6800	81.60	15600/14100	151.5	5.44	80.4	464.0	1
PF80801B1-0000-A9H	☉	12	3500	42.00	12600/11300	122.0	3.66	75.1	464.0	2

Function


PF80801BX / 1

A9H: AutoRestart



G9H: AutoRestart and F type

S9H: AutoRestart , F type and PWM

External dimensions(mm)

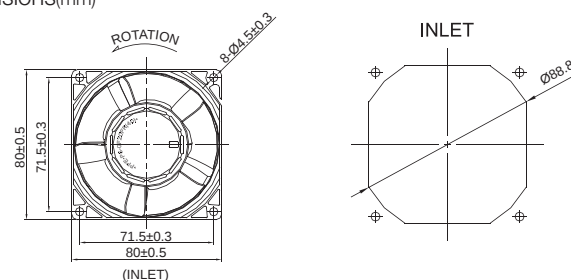

Air Flow-Static Pressure Characteristics

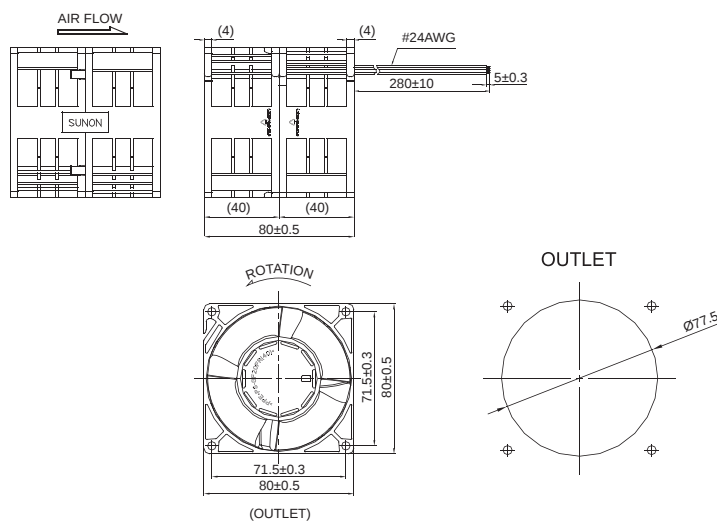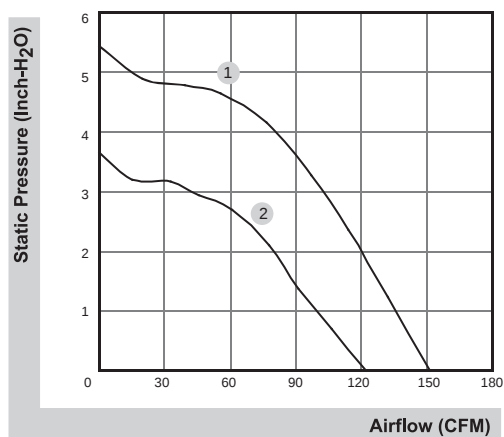

*All model could be customized. Please contact with Sunon Sales.

*Specifications are subject to change without notice. Please Visit SUNON website at www.sunon.com for update information.