



Raychem TFT-R Tool Free Termination

KEY FEATURES

- Provides maintenance free, long life even in highly contaminated areas
- Material does not degrade in outdoor applications, outstanding UV stability
- Crush resistant core prevents collapsing due to rough handling*
- Quick and easy installation
- Seals out all moisture and contamination
- Provides easier installation in confined spaces
- Fewer kits to accommodate a wider range of cable sizes

The TFT-R elastomeric medium voltage cable termination is available for both shielded and non-shielded indoor and outdoor applications. TFT-R terminations are designed for customers who prefer cold applied terminations.

The TFT-R termination is the latest advancement in cold-applied terminations. These terminations feature an advanced stress control system using metal oxide matrix technology that provides superior electrical performance. They feature an outer elastomeric insulation tubing formulated for long-term performance in extreme environments. The tubing comes with a pre-lubricated, crush resistant core (holdout) for simple installation*. The superior elastomeric insulation tubing, together with the positive positioned stress control system and moisture sealing mastic, provide simple, reliable, and consistent installations.

TFT-R, TFT-G, and TFT-R-SG terminations are designed for 5/8, 15, 25 and 35 kV single conductor shielded and non-shielded extruded dielectric cables up to 1250 kcmil.

Additional Key Features

- Stress control patch provides excellent electrical performance and prevents misplacement of stress control system.
- Termination can be adjusted for proper position after installation on cable.
- Terminations meet or exceed industry standards.

Note: (*) excludes TFT-P-R variety, as holdouts are not used.

Raychem
from TE Connectivity

Kit Contents

Each TFT-R, TFT-R-G, and TFT-R-SG termination kit contains an outer elastomeric insulation tubing on a pre-lubricated, crush resistant core (holdout), a stress control patch, sealing mastic, grounding components, and installation instructions.

TFT-R-G and TFT-R-SG termination kits also include cable prep and cleaning components.


Installation

Each kit contains an easy to follow installation instruction with visual displays of the installation steps. Installation is fast and simple. The selection guide can assist with selecting the appropriate kit for your specific cable size.

Specifications

The TFT-R terminations meet or exceed all rating requirements of IEEE 48-1996 for Class 1 terminations.

For special applications, contact your local TE sales office.

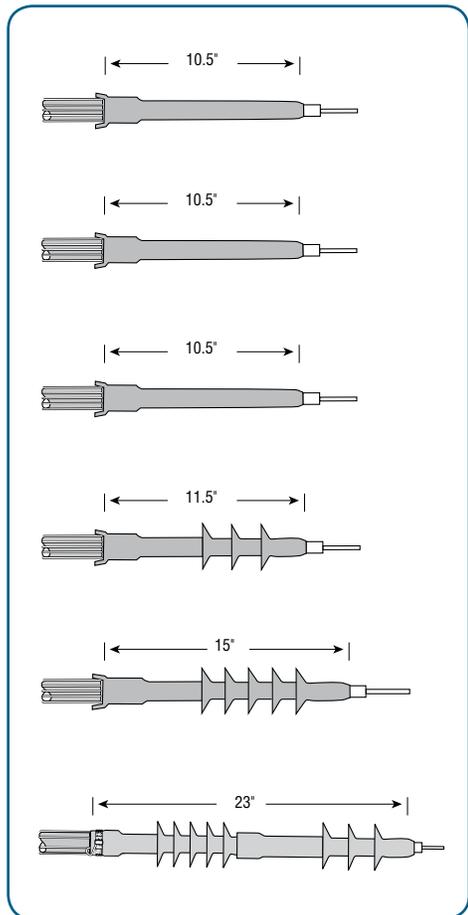

Product Selection Information: Dimensions in inches (mm/metric)			
	Nominal Conductor Size (5 and 8 kV)		Min./Max. Insulation ODs*
TFT-P-R (Shielded, Indoor) PUSH ON INSTALLATION			
	5 kV/8 kV		
TFT-P-80R	#6 - #2 AWG		0.39 - 0.61" (10 - 16)
TFT-R (Non-Shielded, Indoor and Outdoor)			
	5 kV		
TFT-50R	#2 - 3/0 AWG		0.53 - 0.80" (13 - 20)
TFT-51R	#1 AWG - 350w kcmil		0.64 - 1.09" (16 - 28)
TFT-52R	250 - 750 kcmil		0.85 - 1.45" (22 - 37)
TFT-53R	500 - 1250 kcmil		1.06 - 1.70" (27 - 43)
TFT-54R	1000 - 2000 kcmil		1.49 - 2.20" (38 - 56)
TFT-R-G (Shielded, Indoor and Outdoor)			
	5 kV	8 kV	
TFT-150R-G	#2 - 3/0 AWG	#2 - 3/0 AWG	0.53 - 0.80" (13 - 20)
TFT-151R-G	#2/0 AWG - 500 kcmil	#1/0 AWG - 350 kcmil	0.64 - 1.09" (16 - 28)
TFT-152R-G	350 - 1000 kcmil	250 - 750 kcmil	0.85 - 1.45" (22 - 37)
TFT-153R-G	750 - 1250 kcmil	500 - 1000 kcmil	1.06 - 1.70" (27 - 43)
TFT-R-G (Shielded, Indoor)			
	15 kV		
TFT-150R-G	#2 - 3/0 AWG		0.53 - 0.80" (13 - 20)
TFT-151R-G	#2 - 250 kcmil		0.64 - 1.09" (16 - 28)
TFT-152R-G	4/0 - 500 kcmil		0.85 - 1.45" (22 - 37)
TFT-153R-G	500 - 750 kcmil		1.06 - 1.70" (27 - 43)
TFT-R-SG (Shielded, Outdoor)			
	15 kV		
TFT-151R-SG	#2 - 250 kcmil		0.64 - 1.09" (16 - 28)
TFT-152R-SG	4/0 - 500 kcmil		0.85 - 1.45" (22 - 37)
TFT-153R-SG	500 - 750 kcmil		1.06 - 1.70" (27 - 43)
TFT-154R-SG	1000 - 1250 kcmil		1.49 - 2.20" (38 - 56)
	25 kV		
TFT-251R-SG	#1 - 3/0 AWG		0.64 - 1.09" (16 - 28)
TFT-252R-SG	#2/0 - 500 kcmil		0.85 - 1.45" (22 - 37)
TFT-253R-SG	250 - 750 kcmil		1.06 - 1.70" (27 - 43)
TFT-254R-SG	750 - 1250 kcmil		1.49 - 2.20" (38 - 56)
	35 kV		
TFT-352R-SG	1/0 - 250 kcmil		0.85 - 1.45" (22 - 37)
TFT-353R-SG	4/0 - 500 kcmil		1.06 - 1.70" (27 - 43)
TFT-354R-SG	500 - 1250 kcmil		1.49 - 2.20" (38 - 56)

Note: (*) denotes 5, 8 and 15 kV insulation ODs and nominal conductor sizes are based on 100 and 133% compact and concentric stranded cable dimensions. 25 and 35 kV ODs are based on 100% compact and concentric stranded cable dimensions.

TE Technical Support Center

USA: +1 (800) 327-6996
 Canada: +1 (905) 475-6222
 Mexico: +52 (0) 55-1106-0800
 Latin/S. America: +54 (0) 11-4733-2200
 UK: +44 (0) 800-267666
 France: +33 (0) 1-3420-8686
 Netherlands: +31 (0) 73-6246-999
 China: +86 (0) 400-820-6015

energy.te.com

© 2005, 2007, 2009 - 2012 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved.

1308238 E127 09/2012
 Raychem, TE Connectivity and TE connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

Related Product Information: 15 kV - Test Report: EDR-5302 | 25 kV - Test Report: EDR-5303
 35 kV - Test Report: EDR-5299 | Indoor - Non-shedded -Test Report: EDR-5306 | TFT-P - Test Report: EDR-5527

Packaging: Standard packaging is three terminations per box.

Available Accessories: The BRKT series of stainless steel cable mounting brackets are available. Four sizes of brackets accommodate cable diameters from 0.80 - 2.40". The MOD-3-TFT series of three conductor modification kits are available. Kits provide re-jacketing of phase conductors and breakout seals. A complete line of Utilux copper compression terminals are also available.

Related Product Information: NCTR-99-065 - Salt fog and tensile strength test report.



While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.